



600WT Wheel Drive Series Compact Axial Piston Integrated Gearmotor

Bonfiglioli's 600W wheel drives represent the best choice for wheeled agriculture equipment, such as Self-propelled Agricultural Sprayers.

The new 606WT is the perfect combination of proven mechanical parts, with a new, integrated 68cc. variable hydraulic motor especially developed for closed loop, high demanding, applications.

Features

- Integrated swash plate hydraulic motor
- Available with both hydraulic two position or electric proportional variable displacement control
- Zero displacement capacity
- Spring-applied hydraulic release integrated parking brake
- Easier and faster assembly on the machine

Motor Specifications

Max inlet pressure: 475 barMax delta pressure: 450 bar

• Max flow: 160 l/min

• Max shaft speed: 4700 rpm


Special options

- Mechanical gear disengagement
- Speed Sensor
- Dynamic service brake with inspection port, directly serviceable from motor side (no need to remove it from the machine)






| Туре | Output torque (Nm) |
|--------|--------------------|
| 605 XT | 12000 |
| 606 WT | 17000 |
| 607 WT | 22000 |



* Referred to 606WT type

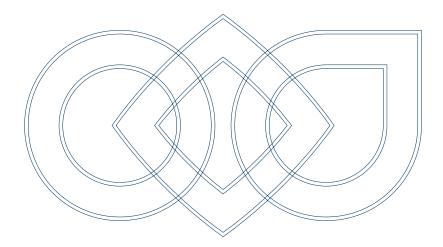

SS Bonfiglioli

HEADQUARTERS

Bonfiglioli Riduttori S.p.A.

Via Giovanni XXIII, 7/A • 40012 Lippo di Calderara di Reno • Bologna (Italy)
tel: +39 051 647 3111 • fax: +39 051 647 3126
bonfiglioli@bonfiglioli.com • www.bonfiglioli.com

