

## QMPS / QMPS-N

Both built-in sounds and option for external sound input via SD card (MP3) have 30 built-in sounds  
Able to avoid sound confusion with a variety of tone options



QMPS I QMPS-N

- QMPS(SD card(MP3) support)
- User defined 30 sounds
- 30 built-in sounds
- QMPS-N(standard unit)
- 30 built-in sounds

### PRODUCT SPECIFICATION

QMPS I QMPS-N

**Materials** Housing-ABS, Cover-ABS  
**Ambient operating temperature** -25°C to +50°C  
**Volume** Max.85dB at 1m  
**Protection rating** IP54  
**Compliant with RoHS directive**

- Can prevent cross talk of different voice environments by selecting an audio signal fit for the specific environment and condition
- Offers both Binary and Bit input mode options with 30 pre-recorded sounds
- Binary input mode has built-in 30 messages that can be played with switch for sound selection
- Bit input mode is organized into 6 groups of 5 sound tones for a total of 30 sound tone options. Playback can be selected from one of the 5 tones in each group (MP3 file with bit input mode)
- Volume adjustment and sound selection switches located inside the unit
- SD card type can play MP3 voice messages, user can select and change the sound message after record it
- Customer can choose any built-in sounds among 30 sound tons in case of a standard unit.

### User-defined sound(MP3)


- User-defined sound(MP3) type



You can easily rearrange the sound playback and group arrangement with PC. Capacity is 32Gbyte.

### Features


- Standard unit does not support either SD card or Play mode.



- 1 Switch for Sound selection
- 2 SD card slot for MP3
- 3 Switch for play Mode selection
- 4 Switch for Volume adjustment

### Sound Selection Instruction for SDcard Type

- SD card type unit
- It can choose both built-in sounds and user defined sounds(MP3) by controlling sound setup switch no. 1.
- Standard unit
- It can choose both Bit input mode and Binary input mode by controlling sound setup switch no. 1.



#### Sound Selection

0: Built-in sound  
1: SD Card(MP3)

#### Standard unit(Built-in sound only)

0:Bit input(Can choose 5 channels per group)  
1:Binary(Can choose 30 channels)

#### Bit input mode selection from 6 groups

001: WS(5 Warning sounds)  
010: WP(5 Special warning sounds 1st group)  
011: WM(5 Melodies)  
100: WA(5 Alarms)  
101: WO(5 Special warning sounds 2nd group)  
110: WN(5 Special warning sounds 3rd group)

- 30 pre-recorded sounds offered(5 warning sounds, 5 special warning sounds 1st group, 5 melodies, 5 alarms, 5 special warning sounds 2nd group, 5 special warning sounds 3rd group)
- External MP3 sound support(SD card)
- Binary input: 30 channels
- Bit input: 5 channels(6 sound groups)
- A multi-functional product that can use an SD card for MP3 playback
- Please refer to [Sound pattern and combination for multifunctional product] on this catalogue for channel input setting.

### Features per modelst

	QMPS(MP3)	QMPS-N(standard unit)	Column
Support SD card(MP3)	O	X	
Support 30 built-in sounds	O	O	
Play mode	O	X	
Bit/Binary input	O	O	Please refer to sound setup switch manual parts



## QMPS Panel Mounted Speaker, Max. 95dB

Model number	Voltage	Current	Volume	Input Method /No. of Ch	Certificates	Weight
QMPS SD card	DC12V -24V	Max. 0.570A	· SD card Built-in sound : Max.98dB (Based on WS-Ch17)	· Bit Input: 5Ch · Binary Input: 30Ch	CE UL	0.35kg
	AC110V -220V	Max. 0.100A	· MP3: Max.90dB			0.53kg

※ When playing MP3 files, there may be difference of volume depending on user's audio file type.

※ DC type model has a free-voltage range of 10V-30V.

※ AC type model has a free-voltage range of 100V-240V.

※ CE compliant: DC12/24V, UL Listed: DC12/24V



QMPS

## QMPS-N Panel Mounted Speaker, Max. 95dB

Model number	Voltage	Current	Volume	Input Method /No. of Ch	Certificates	Weight
QMPS-N Built-in standard sound	DC12V -24V	Max. 0.365A	· Built-in standard sound Built-in sound : Max.95dB (Based on WS-Ch17)	· Bit Input: 5Ch · Binary Input: 30Ch	CE	0.35kg
	AC110V -220V	Max. 0.110A				0.53kg

※ DC type model has a free-voltage range of 10V-30V.

※ AC type model has a free-voltage range of 100V-240V.

※ CE compliant: DC12/24V




QMPS-N

## Technical Diagram

·QMPS / QMPS-N

Units: mm

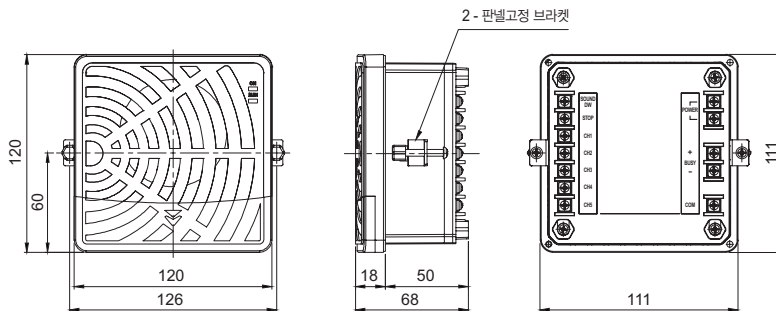

전원 및 음색 결선용 단자대(후면)

## Ordering Specification

·QMPS

QMPS	-	12/24	-	INS
[Model number]		[Voltage]		[Including SD card]
QMPS		12/24-DC12V-24V 110/220-AC110V-220V		(None)-Without SD card INS-Including SD card

·QMPS-N

QMPS	-	12/24
[Model number]		[Voltage]
QMPS-N		12/24-DC12V-24V 110/220-AC110V-220V